


DIAPHRAGM PUMP 1 1/2" SST-VITON-VITON ATEX

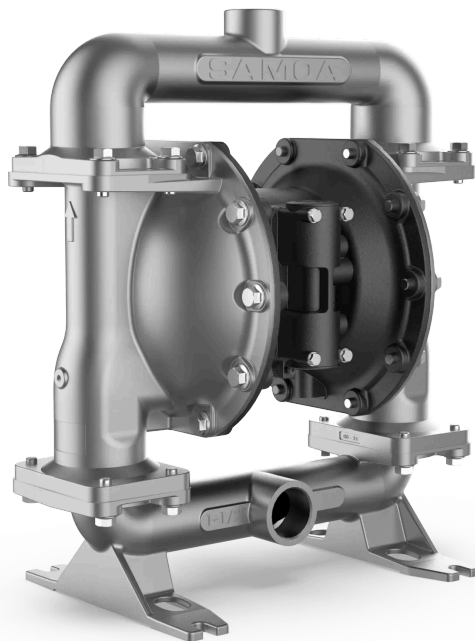

Part No
UP15A-BSS-SVV

TECHNICAL DATA

DIAPHRAGM PUMP 1 1/2" SST-VITON-VITON ATEX

SAMOA diaphragm pump - compressed air driven for stationary or portable use. Can run dry without damage and requires no electrical connection. Depending on the material selected, handles both clean, dirty, corrosive and abrasive liquids. Automatic start/s

TECHNICAL DATA	
Part No	UP15A-BSS-SVV
Ratio	1:1
Capacity	475 l/min free flow
Air connection	1/2" (F) NPT
Maximum air pressure	0,8 (8) MPa (bar)
Inlet	1 1/2" (F) BSP
Outlet	1 1/2" (F) BSP
Seals	FKM / Viton®
Max suction height	9 m
Max particle size	6,4 (1/4) mm (inch)
Material pump body	Stainless steel (AISI 316)
Material diaphragm	FKM / Viton®
Material balls	FKM / Viton®
Material ball valve seats	Stainless steel (AISI 316)
Certification	Ex II2 GD IIB/IIC 95 °C
Weight (Gross)	40 kg
H.S. Code	84138100