


DIAPHRAGM PUMP 1 1/2" SST-PTFE-PTFE ATEX

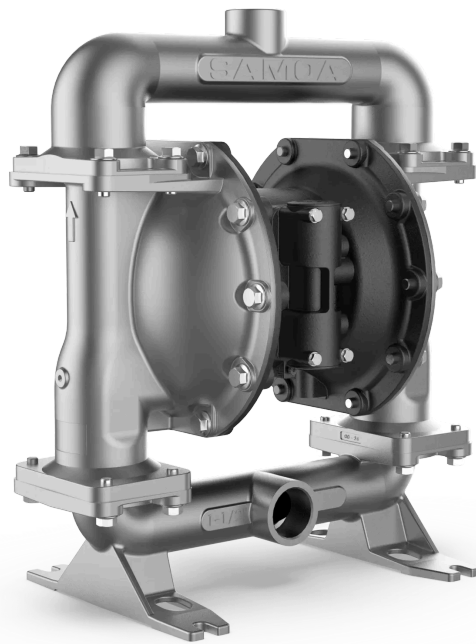

Part No
UP15A-BSS-STZ

TECHNICAL DATA

DIAPHRAGM PUMP 1 1/2" SST-PTFE-PTFE ATEX

SAMOA diaphragm pump - compressed air driven for stationary or portable use. Can run dry without damage and requires no electrical connection. Depending on the material selected, handles both clean, dirty, corrosive and abrasive liquids. Automatic start/s

TECHNICAL DATA	
Part No	UP15A-BSS-STZ
Ratio	1:1
Capacity	475 l/min free flow
Air connection	1/2" (F) NPT
Maximum air pressure	0,8 (8) MPa (bar)
Inlet	1 1/2" (F) BSP
Outlet	1 1/2" (F) BSP
Seals	PTFE / Teflon®
Max suction height	9 m
Max particle size	6,4 (1/4) mm (inch)
Material pump body	Stainless steel (AISI 316)
Material diaphragm	PTFE / Teflon®
Material balls	PTFE / Teflon®
Material ball valve seats	Stainless steel (AISI 316)
Certification	Ex II2 GD IIB/IIC 95 °C
Weight (Gross)	40 kg
H.S. Code	84138100

RELATED PRODUCTS

PART NO	DESCRIPTION	
UP15R-AM-1A0	Air motor kit for UP15A	
UP15R-AM-300	Air shaft kit, for UP15	
UP15R-WP-S00	Seat kit 316 SST for UP15	
42132	Regulator with pressure gauge 1/2" (F) BSP	
UP15R-WP-99T	Seat O-ring kit PTFE for UP15	
UP15R-AM-200	Air sensor kit for UP15	
42121	Filter/Regulator 1/2" (F) BSP	
853443	Adaptor straight 1/2" (F) BSP-(M) NPT	
28515	Needle valve 1/2" (F)-(M) BSP Compressed air Brass	
UP15R-WP-0T0	Ball kit PTFE for UP15	
UP15R-WP-00Z	Diaphragm kit PTFE for UP15A	